

OnSite PRO Inc.

FLOODSTOP™

Stop Flood Damage Before It Really Starts!

FloodStop FS3/8CD is a point of use, leak detection and automatic water shut-off system designed for residential and commercial dwellings. The FS3/8CD uses two Motorized Ball Valves to automatically shut off the water supply whenever your sink or its supply lines leak.



Install in Minutes!


Kit includes everything you need to protect your property:

- 3/8" Motorized Ball Valves installed on both hot and cold water inlets.
- Water sensor is placed on the floor.
- Control Unit is mounted with screws or Velcro (included).
- Optional Power Sources: AC & (4) AA Batteries, or Batteries alone!

Technical Specifications:

- UL listed class 2 wall adaptor, 115AC/9VDC
- UPC listed Motorized Ball Valve: CNC machined.
- Motor operates at 6VDC.
- Signal Output: 1 Normally Open, 24 Volt / 2 amp rated
- Motorized Ball Valve: CNC machined with compression fittings.
- Rated 0-180 PSL Max 250 PSL Solid brass. AB1953, UPC, CUPC, NSF61 cert.
- Rated 32-212 degrees F
- Sensor: 1.25 X 7.5 inch, double sided. Additional sensors may be added in series.
- Alarm: Beeping with Mute button.

Sink FS3/8C 3/8" Compression Fittings

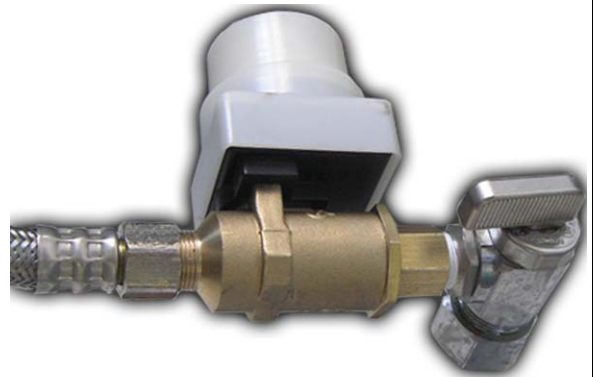

FloodStop Product Lineup:

- FS3/4H-90 Washing Machine (Hose Fittings)
- FS3/4H Washing Machine (Hose Fittings)
- FS3/4NPT Water Heater 3/4" (MIP X FIP)
- FS3/4C Water Heater (3/4" Compression)
- FS100NPT Water Heater (1.00" (MIP X FIP)
- FS125NPT Water Heater (1.25" (MIP X FIP)
- FS1/2NPT Water Heater 1/2" (MIP X FIP)
- FS3/8C Dishwasher, Toilet (3/8" Compression)
- FS3/8CD Sink (3/8" Compression)
- FS1/4C Ice Maker (1/4" Compression)