

RISCO


G R O U P

Creating Security Solutions.

With Care.

riscogroup.com

Indoor Wireless Sounder

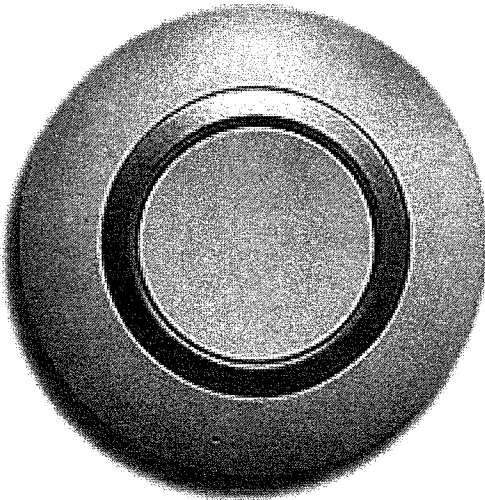

Installation and Programming Instructions

Table of Contents

Introduction	4
Operational Functions	4
Alarm / Tamper Indication	4
Low Battery Indication.....	4
Supervision	4
Pre Alarm Indication.....	4
Sounder Testing.....	4
Mounting the Sounder	5
Programming the sounder	6
Step 1: Sounder/Receiver Communication Set up.....	6
Step 2: Setting the Sounder Parameters.....	6
<i>Adjusting the Volume</i>	7
<i>Muting Tamper</i>	7
<i>Setting Supervision Time</i>	7
<i>Pre Alarm indication</i>	7
Step 3: Testing the Sounder	8
<i>Communication Test</i>	8
<i>Diagnostics</i>	8
Replacing Batteries	8
Technical Information	9

Introduction

RISCO Group's two-way indoor wireless sounder is designed to extend the signaling capabilities of the Risco Group WisDom and Agility wireless systems, within the protected area. The wireless sounder offers an easy and flexible solution for quick installation. The sounder is powered by its own batteries and communicate wirelessly with the security panel using 868MHz or 433MHz frequency band. Up to 3 wireless sounders can be assigned to a system.

Operational Functions

Alarm / Tamper Indication

Upon an alarm condition, the sounder will be activated for a period of time defined by the system (**Bell Time Out** parameter).

The maximum time that the sound will be activated is 5 minutes.

Low Battery Indication

Upon a low battery condition a trouble indication is sent to the panel.

There are 2 types of low battery indications:

- ✦ Radio low battery
- ✦ Speaker low battery

Supervision

Each sounder can be defined to be supervised by the panel. The system generates a local trouble signal identifying the sounder which its signal is not received during a predefined time, followed by a report to the Central Station (if defined).

Pre Alarm Indication

When an entry time starts, the system transmits a pre-alarm signal to the sounder. If the system is disarmed before the entry delay time expires, a cancellation signal is sent to the sounder.

If the sounder does not receive a canceling signal within the entry delay time, the sounder will be activated.

Sounder Testing

Once placing all batteries in place, the sounder performs a functional self test indicated by a squawk sound. Testing the sounder can also be performed remotely by the system keypad, or, using the remote configuration software.

Mounting the Sounder

Release the mounting bracket captive locking screw (Fig 1).

Turn the mounting bracket counterclockwise and separate it from the sounder.

Hold the mounting bracket against the wall (direction arrow pointing up) and mark the locations of the mounting holes (Fig. 2). Drill the desired mounting holes and insert screw anchors (if required).

NOTE:

Do not drill through the mounting bracket.

Mount the bracket to the wall using the supplied screws.

Insert the supplied batteries into the battery chambers (speaker and radio) paying attention to the polarity (Fig 3).

Perform communication set up with the control panel (see Sounder/Receiver Communication Set up paragraph).

Once communication setup is completed, mount the sounder to the mounting bracket by turning the sounder clockwise. Pay attention to the tamper switch.

Secure the captive locking screw.

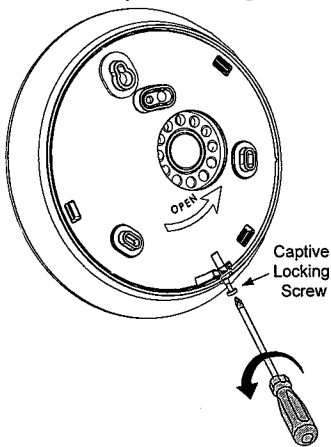


Fig. 1

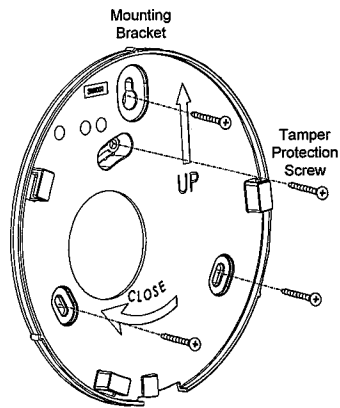


Fig. 2

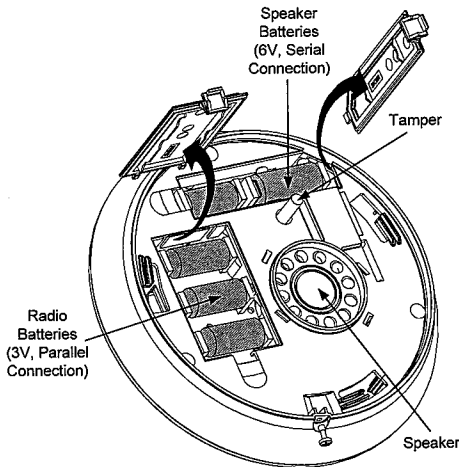


Fig. 3

Programming the sounder

Programming the wireless sounder consists of the following 3 steps:

1. Setting communication between the receiver and the sounder
2. Setting sounder parameters
3. Testing the sounder

Step 1: Sounder/Receiver Communication Set up

The sounder must identify itself to the system's receiver by writing its ID into the System. Perform according to the following steps:

1. Set the receiver to the Write mode.

NOTE:

In the WisDom, as first step, you need to allocate the sounder in the following programming location:
Main engineer menu > 9) Devices > 2) Sounder > 1) Allocation > Select sounder > Choose INWS1

2. Select the sounder's ID.
3. Unpack the supplied batteries
4. Insert two speaker batteries into the batteries chamber (Fig. 3).
5. Insert three Radio batteries into the batteries chamber.
6. After a squawk is heard you have 10 seconds to press on the tamper switch for at least 3 seconds. If the sounder is successfully recognized, the system will sound a confirmation beep and the sounder will initiate a second squawk sound.
7. Repeat the process for other sounders in the system.

Step 2: Setting the Sounder Parameters

Each sounder can be defined with different sets of parameters. The following table describes the list of parameters of the sounder.

NOTE:

For the specific programming location of each parameter refer to the system manuals.

Adjusting the Volume

Defines the sounder sound volume for the following system modes

- **Exit / Entry:** The sound produced during Exit/Entry time (Default: 0)
- **Alarm:** The sound produced during alarm (Default: 9)
- **Squawk:** The sound produced during squawk sounds (Default: 9)

The sound volume range is between 0 (silent) to 5 (maximum volume).

Muting Tamper

This feature disables a tamper alarm from the sounder and it is recommended to be used when replacing sounder's batteries.

NOTES:

1. An ongoing tamper alarm will not be disabled.
2. **WisDom:** This feature is controlled under the Engineer Menu (Quick key [9][2][5]). Tamper alarm will be disabled during the current installation programming period.
3. **Agility:** This feature is controlled under the Grand Master menu. Tamper alarm will be disabled for 20 minutes.

Setting Supervision Time

Specifies how often the system generates a supervision request to the sounder.

If any of the sounders does not respond to the request at least once, during the receiver supervision time, the system will regard the accessory as lost.

NOTE:

The receiver supervision time should be higher than the sounder supervision time in order to eliminate false lost event.

Range: 00-255 minutes

Default: 58 minutes

NOTE:

WisDom: Engineer menu: 1) System > 1) Timers > 9) Accessory supervision time
Agility: Engineer menu: 1) System > 1) Timers > TX supervision

Pre Alarm indication

This wireless sounder incorporates a pre - alarm feature that enhances the security of the system, by producing a local alarm in case of sabotage.

If defined, the system sends a pre-alarm signal to the sounder at the beginning of the entry delay. If the sounder does not receive a cancellation signal from the system at the end of the entry time, the sounder goes into alarm mode.

NOTE:

WisDom (Ver 4.25): Engineer menu Quick key: 1) System > 2) Controls > 44) Pre alarm
Agility: Engineer menu: [1][2] > Advanced > Sounder Pre alarm

Step 3: Testing the Sounder

Communication Test

The sounder communication test performs a communication test between the sounder receiver and the system.

- To perform communication test
1. Access to communication test option

NOTE:

WisDom: Engineer menu > 9) Devices > 2) Sounders > 3) Communication test
Agility: Engineer menu > 2) Testing > 5) Sounder > 1) Communication test

2. The system sends a test signal to the sounders. A number between 00-99 indicates the strength of the communication signal between the system and the sounder.

NOTE:

For successful communication, the strength of the signal should be higher than the sounder receiver noise threshold level.

(WisDom: Engineer menu quick key [9][2][4], Agility: Engineer menu > 2)Testing >1)Main unit > 1)Calibration).

Diagnostics

The Diagnostics menu enables to test parameters reflecting the operation of the sounder:

- ▶ **Speaker batteries voltage:** Tests the selected sounder's speaker batteries voltage
- ▶ **Radio batteries voltage:** Tests the selected sounder's radio's batteries voltage
- ▶ **Sounder version:** Displays information regarding the sounder's version

NOTE:

WisDom: User menu: 4) Maintenance > 7) Sounders > 1) Diagnostics

Agility: Engineer menu > 2) Testing > 5) Sounder > 2) Battery test > 3) Version

The diagnostic features can be also performed from Upload/Download software, locally or remotely

Replacing Batteries

1. Before opening the sounder it is advised to silence the tamper alarm using the Tamper Mute option (see the *Muting Tamper* paragraph on page 7).
2. Unlock the captive screw and remove the sounder from the mounting bracket by turning it counterclockwise.
3. Remove the old batteries from the metal clips and replace with new ones. Pay attention to the polarity.
4. Attach the sounder to the bracket and fasten the cover captive locking screw.

NOTES:

Dispose of old batteries according to your local regulations.

Risk of explosion if battery replaced by an incorrect type.

Technical Information

Electrical

Power Supply	5 X CR123, 3V Lithium Battery (3 batteries for the Radio Transceiver, 2 batteries for the Speaker (see Fig. 3 on page 5))
Battery life	3 years (typical)
Speaker sound level	105 dB @ 1 meters (adjustable)
Size (Ø&D)	Ø183 x 51 mm (7.2 x 2 inch)
Weight (batteries not included)	0.34Kg (12 oz)

Radio

Radio type	Two Way Narrow band
Frequency	868 MHz or 433MHz
Range up to:	150m (492') Line of sight
Supervision	Yes
Modulation Type	ASK

Environmental

Temperature	- 25°C to 60°C (-4°F to 140°F)
IP Rating	IP 44
Environmental Class	Class IV

Ordering Information

Part Number	Description
RWS42043300A	2-Way Indoor Wireless Sounder, 433 MHz
RWS42086800A	2-Way Indoor Wireless Sounder, 868.65 MHz

Specifications are subject to change without prior notice. Should any questions arise please contact your supplier.

RTTE Compliance Statement

Hereby RISCO Group declares that this wireless sounder is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

For the CE Declaration of Conformity please refer to our website: www.riscogroup.com.



FCC Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- a) Reorient or relocate the receiving antenna.
- b) Increase the separation between the equipment and receiver.
- c) Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- d) Consult the dealer or an experienced radio/TV technician.

FCC ID: JE4RWRT433 Valid for P/N RWS42043300A

IC: 6564A-RWRT433 Valid for P/N RWS42043300A

FCC Warning

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

RISCO Group Limited Warranty

RISCO Group Ltd. and its subsidiaries and affiliates ("Seller") warrants its products to be free from defects in materials and workmanship under normal use for 24 months from the date of production. Because Seller does not install or connect the product and because the product may be used in conjunction with products not manufactured by the Seller, Seller cannot guarantee the performance of the security system which uses this product. Seller's obligation and liability under this warranty is expressly limited to repairing and replacing, at Seller's option, within a reasonable time after the date of delivery, any product not meeting the specifications. Seller makes no other warranty, expressed or implied, and makes no warranty of merchantability or of fitness for any particular purpose.

In no case shall seller be liable for any consequential or incidental damages for breach of this or any other warranty, expressed or implied, or upon any other basis of liability whatsoever.

Seller's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect, or consequential damages or delay.

Seller does not represent that its product may not be compromised or circumvented; that the product will prevent any person's injury or property loss by burglary, robbery, fire or otherwise; or that the product will in all cases provide adequate warning or protection. Buyer understands that a properly installed and maintained alarm may only reduce the risk of burglary, robbery or fire without warning, but is not insurance or a guaranty that such will not occur or that there will be no personal injury or property loss as a result.

Consequently seller shall have no liability for any personal injury, property damage or loss based on a claim that the product fails to give warning. However, if seller is held liable, whether directly or indirectly, for any loss or damage arising from under this limited warranty or otherwise, regardless of cause or origin, seller's maximum liability shall not exceed the purchase price of the product, which shall be complete and exclusive remedy against seller.

No employee or representative of Seller is authorized to change this warranty in any way or grant any other warranty.

WARNING: This product should be tested at least once a week.

Contacting RISCO Group

RISCO Group is committed to customer service and product support. You can contact us through our website www.riscogroup.com or as follows:

United Kingdom

Tel: +44-161-655-5500

technical@riscogroup.co.uk

Italy

Tel: +39-02-66590054

support@riscogroup.it

Spain

Tel: +34-91-490-2133

support-es@riscogroup.com

France

Tel: +33-164-73-28-50

support-fr@riscogroup.com

Belgium

Tel: +32-2522-7622

support-be@riscogroup.com

USA

Tel: +305-592-3820

support@riscogroupusa.com

Brazil

Tel: +55-11-3661-8767

support-br@riscogroup.com

China

Tel: +86-21-52-39-0066

support-cn@riscogroup.com

Poland

Tel: +48-22-500-28-40

support-pl@riscogroup.com

Israel

Tel: +972-3-963-7777

support@riscogroup.com

All rights reserved.

No part of this document may be reproduced in any form without prior written permission from the publisher.

